



**JCT**  
Analysentechnik

# JCM-310 and JCMF-310 Peltier Sample Gas Coolers



Gas Sampling  
Probes

Heated Sample  
Lines

Sample Gas Coolers

Condensate  
Treatment

Accessories

Gas Conditioning  
System

Sample Gas  
Converters

## APPLICATION

- Extractive gas analysis
- Emission and process monitoring
- Continuous drying of sample gas to a precise low and constant outlet dew point
- Minimises water vapour cross sensitivities and volumetric errors

## BENEFITS

- Very powerful compact complete unit with condensate removal
- High flow rates of up to 250 NI/h
- Very low wash out ratios even at high water vapour concentrations in the sample gas
- High inlet dew points up to 80 °C possible
- Reliable condensate separation even at very high ambient temperatures up to 50 °C
- Extremely precise long-term stable dew point even under varying loads
- Maximum operational safety
- Low maintenance operation
- Easy to maintain design

## FEATURES

- Frame mounting for cabinets or wall mounting
- New heat exchanger JHEX-4 in different materials
- Intelligent digital control electronic
- Applicable up to an ambient temperature of 50 °C
- Condensate pump as option
- Status contact for temperature thresholds as well as for condensate alarm
- Visual alerting via LEDs
- Self monitoring with deactivation of the external sample pump in case of alarm
- Ready for operation within less than 15 minutes

## TECHNICAL DATA


| Model   | JCM-310  | JCM-312          | JCMF-310                                  | JCMF-312         |
|---|--|------------------|---|------------------|
| Description of sample gas cooler  | standard   | high-performance | standard                                  | high-performance |
| Cooling principle   | Peltier cooling  |                  |   |                  |
| Number of gas paths   | 1  |                  |   |                  |
| Number of peltier elements per active gas paths                         | 1  | 2                | 1   | 2                |
| Integrated condensate pump (option)                                     | 1  |                  | -   |                  |
| <b>Operation</b>  |  |                  |   |                  |
| Gas flow per gas path*  | max. 250 NI/hr   |                  |   |                  |
| Gas inlet temperature*  | max. 140 °C; SS heat exchanger: max. 180 °C                      |                  |   |                  |
| Gas inlet dew point*  | max. 80 °C   |                  |   |                  |
| Gas outlet dew point  | +5 °C (factory default); adjustable from +0,5 °C to +7,5 °C      |                  |   |                  |
| Dew point stability<br>(for constant inlet conditions)                  | ±0,1 K   |                  |   |                  |
| Ambient temperature   | +5° to +40 °C  | +5° to +50 °C    | +5° to +40 °C                             | +5° to +50 °C    |
| Cooling capacity total  | max. 15 W  | max. 30 W        | max. 15 W                                 | max. 30 W        |
| Operating pressure with condensate pump                                 | 0,2 to 2,2 bara  |                  | -   |                  |
| Max. operating pressure without condensate pump                         | 4,0 bara; SS heat exchanger: max. 19 bara                        |                  |   |                  |
| Ready for operation   | < 15 min   |                  |   |                  |
| Pressure drop at max. flow rate   | 3 mbar   |                  |   |                  |
| <b>Construction</b>   |  |                  |   |                  |
| Dimensions over all (W x H x D)   | 289 x 308 x 140 mm   |                  | 180 x 340 x 205 mm                        |                  |
| Installation  | wall mounting  |                  | frame mounting                            |                  |
| Mounting position   | horizontal   |                  |   |                  |
| Weight**  | approx. 9,3 kg   |                  | approx. 9,3 kg                            |                  |
| Housing / Colour  | stainless steel / natural  |                  |   |                  |
| Gas wetted materials (depending on configuration)                       | aluminium coated, PVDF, SS316Ti, FFKM, Duran glass               |                  |   |                  |
| Dead volume per gas path  | 67 ml  |                  |   |                  |
| Connection sample gas and condensate outlet<br>with/for condensate pump | PVDF-hose fitting DN 4/6   |                  |   |                  |
| Condensate outlet without condensate pump                               | 1/4"NPTf or 3/8"NPTf   |                  |   |                  |
| Approvals / Signs   | CE   |                  |   |                  |
| <b>Electrics</b>  |  |                  |   |                  |
| Power supply  | 230 VAC 50/60 Hz +/- 10 % or 115 VAC 50/60 Hz +/- 10 %           |                  |   |                  |
| Power consumption<br>(depending on load and ambient temperature)        | 30 to 160 VA   |                  |   |                  |
| Connection power  | 2 x cable conduit M12  |                  | external PCB                              |                  |
| Protection class<br>(in default mounting position)                      | IP 54 (EN 60529)   |                  | IP 54 (EN 60529)<br>PCB: IP 00 (EN 60529) |                  |
| Fusing  | lead fuse T2A  |                  |   |                  |
| On time   | 100 %  |                  |   |                  |
| Diagnostic / Operation indicator  | 1 x bicolour-LED   |                  |   |                  |
| Status threshold  | < 0 / > +10 °C   |                  |   |                  |
| Status delay  | 0,5 s  |                  |   |                  |
| Status relay  | volt free contact, 230 VAC / 2 A, min. 5 VADC / 5 mA             |                  |   |                  |
| Connection terminals / Clamping range                                   | spring type terminals 0,5 mm <sup>2</sup> to 2,5 mm <sup>2</sup> |                  |   |                  |

\* Results from the effective cooling capacity at 20 °C ambient temperature and 5 °C outlet dew point and can be influenced by further operational parameters


\*\* Dependent on configuration

## TECHNICAL DATA

**Outlet dew point in dependence on the ambient temperature JCM-312 / JCMF-312**

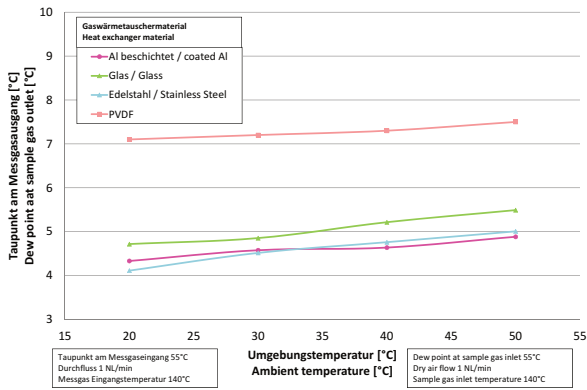


**Outlet dew point in dependence on the inlet dew point JCM-312 / JCMF-312**

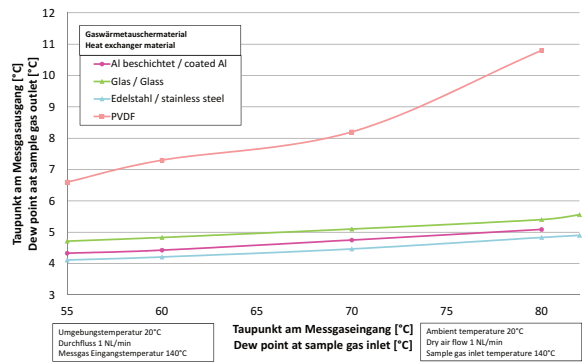


## DIMENSIONS

Dimensions in mm


**JCM-310**

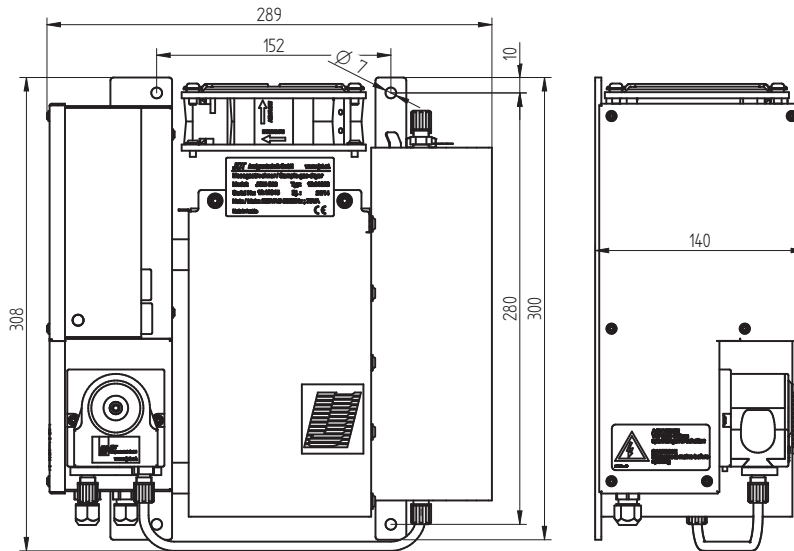

**JCMF-310**

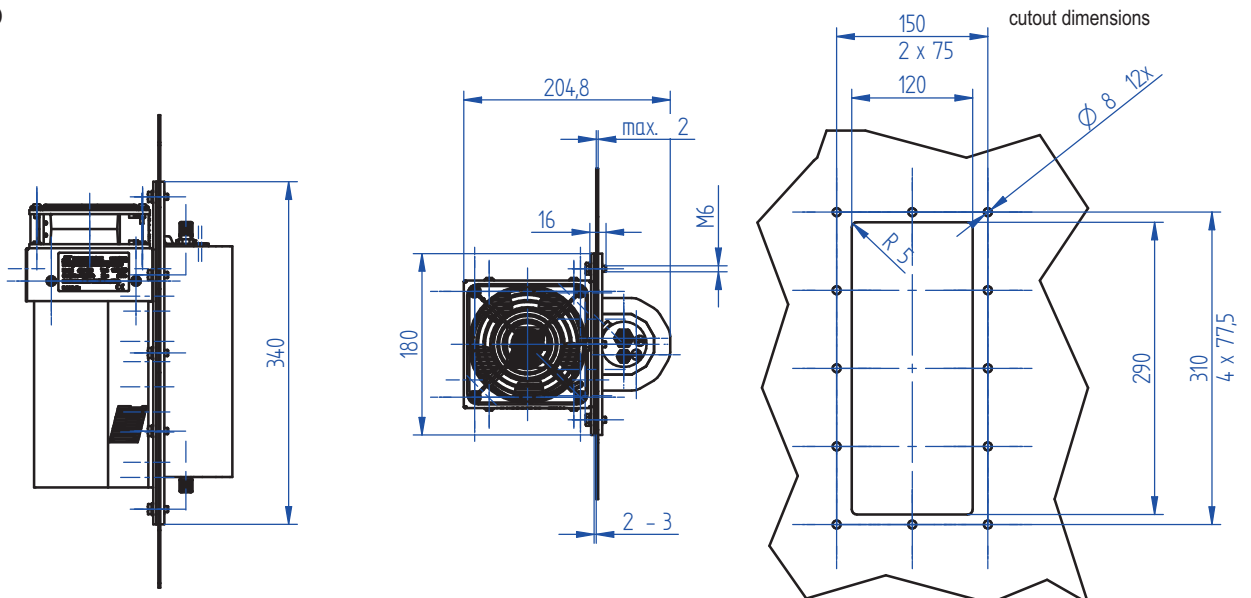

## GAS FLOW DIAGRAMS

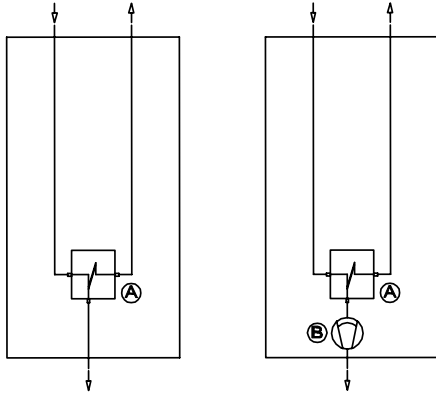

- A Actively cooled heat exchanger optionally with one or two peltier elements
- B Condensate pump (option)

## ORDER CODE

### JCM-310 series

|                  |  |    |   |   |   |
|------------------|--|----|---|---|---|
| Performance      | standard   | 0. |   |   |   |
|                  | high-performance                                 | 2. |   |   |   |
| Heat exchanger   | JHEX-4 heat exchanger Aluminium coated           |    | 1 |   |   |
|                  | JHEX-4 heat exchanger PVDF                       |    | 2 |   |   |
|                  | JHEX-4 heat exchanger Duran glass                |    | 3 |   |   |
|                  | JHEX-4 heat exchanger stainless steel            |    | 4 |   |   |
| Condensate pumps | with condensate pump JSR-25                      |    |   | 1 |   |
|                  | without condensate pump JSR-25, 1/4" NPTf outlet |    |   | 2 |   |
|                  | without condensate pump JSR-25, 3/8" NPTf outlet |    |   | 3 |   |
| Power supply     | 230 VAC 50/60 Hz                                 |    |   |   | A |
|                  | 115 VAC 50/60 Hz                                 |    |   |   | B |

Order code

**JCM-31**        


### JCMF-310 series

|                   |  |    |   |   |   |
|-------------------|--|----|---|---|---|
| Performance       | Standard                               | 0. |   |   |   |
|                   | high-performance                       | 2. |   |   |   |
| Heat exchanger    | JHEX-4 heat exchanger Aluminium coated |    | 1 |   |   |
|                   | JHEX-4 heat exchanger PVDF             |    | 2 |   |   |
|                   | JHEX-4 heat exchanger Duran glass      |    | 3 |   |   |
|                   | JHEX-4 heat exchanger stainless steel  |    | 4 |   |   |
| Condensate outlet | PVDF-hose fitting DN 4/6               |    |   | 1 |   |
|                   | 1/4" NPTf outlet                       |    |   | 2 |   |
|                   | 3/8" NPTf outlet                       |    |   | 3 |   |
| Power supply      | 230 VAC 50/60 Hz                       |    |   |   | A |
|                   | 115 VAC 50/60 Hz                       |    |   |   | B |

Order code

**JCMF-31**        

Gas Sampling Probes



Heated Sample Lines



Sample Gas Coolers



Gas Conditioning Systems



NOx Converter



and solutions for

