

2301P and 2501P Remote Airborne Particle Counters

0.1 CFM (2.83 LPM)




The 2301P and 2501P particle counters provide a range of particle size measurement from 0.3 or 0.5 to 25.0 μm at a flow rate of 0.1 CFM (2.83 LPM). These sensors allow for efficient particle counting with specifications that exceed the ISO 21501-4 and JIS B9921 calibration standards.

These sensors have 4 fixed particle size channels and are equipped with an internal pump and manifold and do not require an external vacuum source. Integration into a building automation or facility monitoring system is easy via isolated RS-485 Modbus communication.

Features and Benefits

- 2301P: Measures 0.3 μm to 25.0 μm
- 2501P: Measures 0.5 μm to 25.0 μm
- 0.1 CFM (2.83 LPM) flow rate
- Long life laser diode technology
- Measures up to 4 channels of simultaneous data
- Particle concentrations up to 15,000,000 Particles/ft³ @ 10% coincidence loss
- Internal vacuum pump
- Internal HEPA filter
- Connect using Modbus RTU/ASCII over isolated RS-485
- Complies with ISO 21501-4 and JIS B9921 standards
- Easy to clean and wipe down with minimal particle traps
- Versatile mounting options
- User configurable alarm light
- LED Indicators
- Seamless integration into a facility monitoring system
- Lightweight stainless steel enclosure
- 2 year warranty. Extended warranties available.

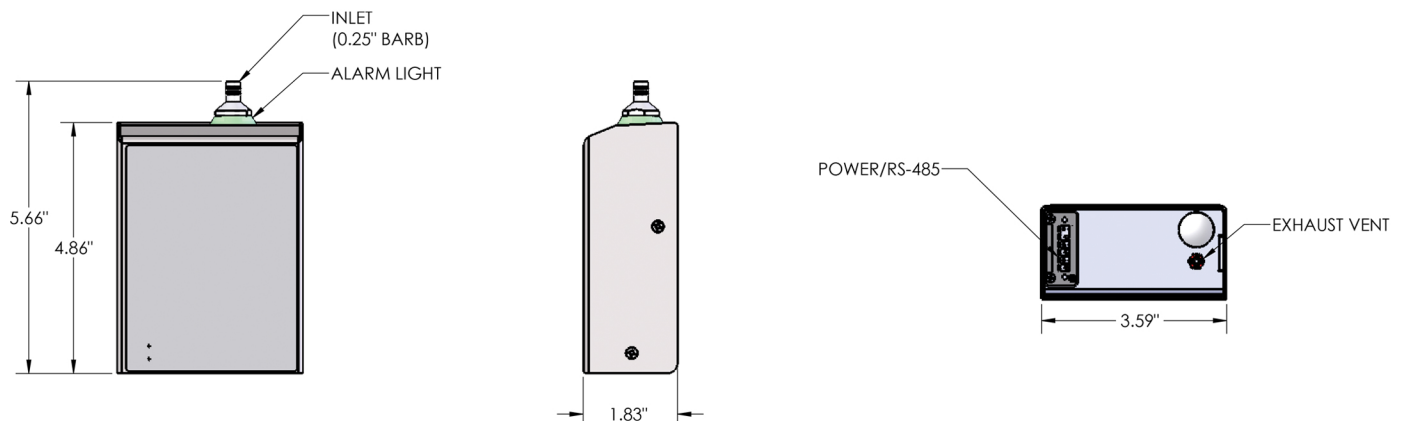



Specifications

Model	2301P	2501P
Size Range	0.3 to 25.0 μm	0.5 to 25.0 μm
Size Channels	Factory calibrated at 0.3, 0.5, 1.0, 5.0 μm	Factory calibrated at 0.5, 1.0, 2.5, 5.0 μm
Number of Channels	4	4
Counting Efficiency	50% @ 0.3 μm ; 100% for particles > 0.45 μm per JIS	50% @ 0.5 μm ; 100% for particles > 0.75 μm per JIS
Flow Rate	0.1 CFM (2.83 LPM)	
Concentration Limits	15,000,000 Particles/ft ³ @ 10% coincidence loss	
Light Source	Long life laser diode	
Zero Count	< 1 count / 60 minutes (< 1 particles / 6/ft ³)	
Calibration	NIST traceable	
Vacuum Source	Internal Vacuum Pump	
Airflow	Internally monitored	
Filtered Exhaust	Internal HEPA filter	
Alarm	User configurable alarm light	
Communication Modes	MODBUS™ RTU or ASCII outputs (over isolated RS-485)	
Standards	ISO 21501-4 and JIS B9921	
Instrument Calibration	Recommended minimum once per year	
External Surface	Stainless steel	
Dimensions (L x W x H)	3.59" x 1.83" x 5.66" (9.1 cm x 4.6 cm x 14.3 cm) including probes and connectors	
Weight	1.94 lb. (0.88 kg)	
Accessories	Wiring Connector, operating manual on USB flash drive	
Optional Accessories	Power Supply, Remote Mounting Bracket, Stainless Steel Barbed Isoprobe (0.1 CFM/2.83 LPM), Purge Filter Assembly, and Sample & Vacuum Tubing	
Sample Time	1 second to 18 hours	
Power	9 - 24 VDC (< 2.5 watts)	
Operating Conditions	41° to 104°F (5° to 40°C) / 20% to 95% non-condensing	
Storage Conditions	32° to 122°F (0° to 50°C) / Up to 98% non-condensing	
Warranty	2 year limited warranty. Extended warranties available.	

PAT. <https://particlepatents.com/> Additional Patents Pending.

Particles Plus, Inc. reserves the right to change specifications without notice. Contact hello@particlesplus.com or your local distributor for more details. Particles Plus and the Particles Plus logo are trademarks of Particles Plus, Inc. ©2022 Particles Plus, Inc. All rights reserved.

REV 20220302-2510-2510-2



31 Tosca Drive
Stoughton, MA 02072 U.S.A.
+1-781-341-6898
www.particlesplus.com